



**(43) International Publication Date**  
**3 March 2005 (03.03.2005)**

# PCT

**(10) International Publication Number**  
**WO 2005/020272 A3**

**(51) International Patent Classification<sup>7</sup>: H01J 23/38,**  
**25/593**

**(21) International Application Number:**  
PCT/GB2004/003533

**(22) International Filing Date:** 17 August 2004 (17.08.2004)

**(25) Filing Language:** English

**(26) Publication Language:** English

**(30) Priority Data:**  
0319389.3      18 August 2003 (18.08.2003)      GB

(71) **Applicant (for all designated States except US): E2V TECHNOLOGIES (UK) LIMITED** [GB/GB]; 106 Waterhouse Lane, Chelmsford, Essex CM1 2QU (GB).

**(72) Inventors; and**

**(75) Inventors/Applicants (for US only):** CHEN, Xiaodong  
[GB/GB]; 16 Barrington Road, Sutton, Surrey SM3 9PP

(GB). **LINDSAY, Peter** [GB/GB]; 90 Abinger Road, Bedford Park, London W4 1EX (GB). **ESTERSON, Maurice** [GB/GB]; 106 Waterhouse Lane, Chelmsford, Essex CM1 2QU (GB).


**(74) Agent: LOVELESS, Ian, Mark; 16 Theobalds Road, London WC1X 8PL (GB).**

**(81) Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**(84) Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

*[Continued on next page]*

**(54) Title:** MAGNETRON

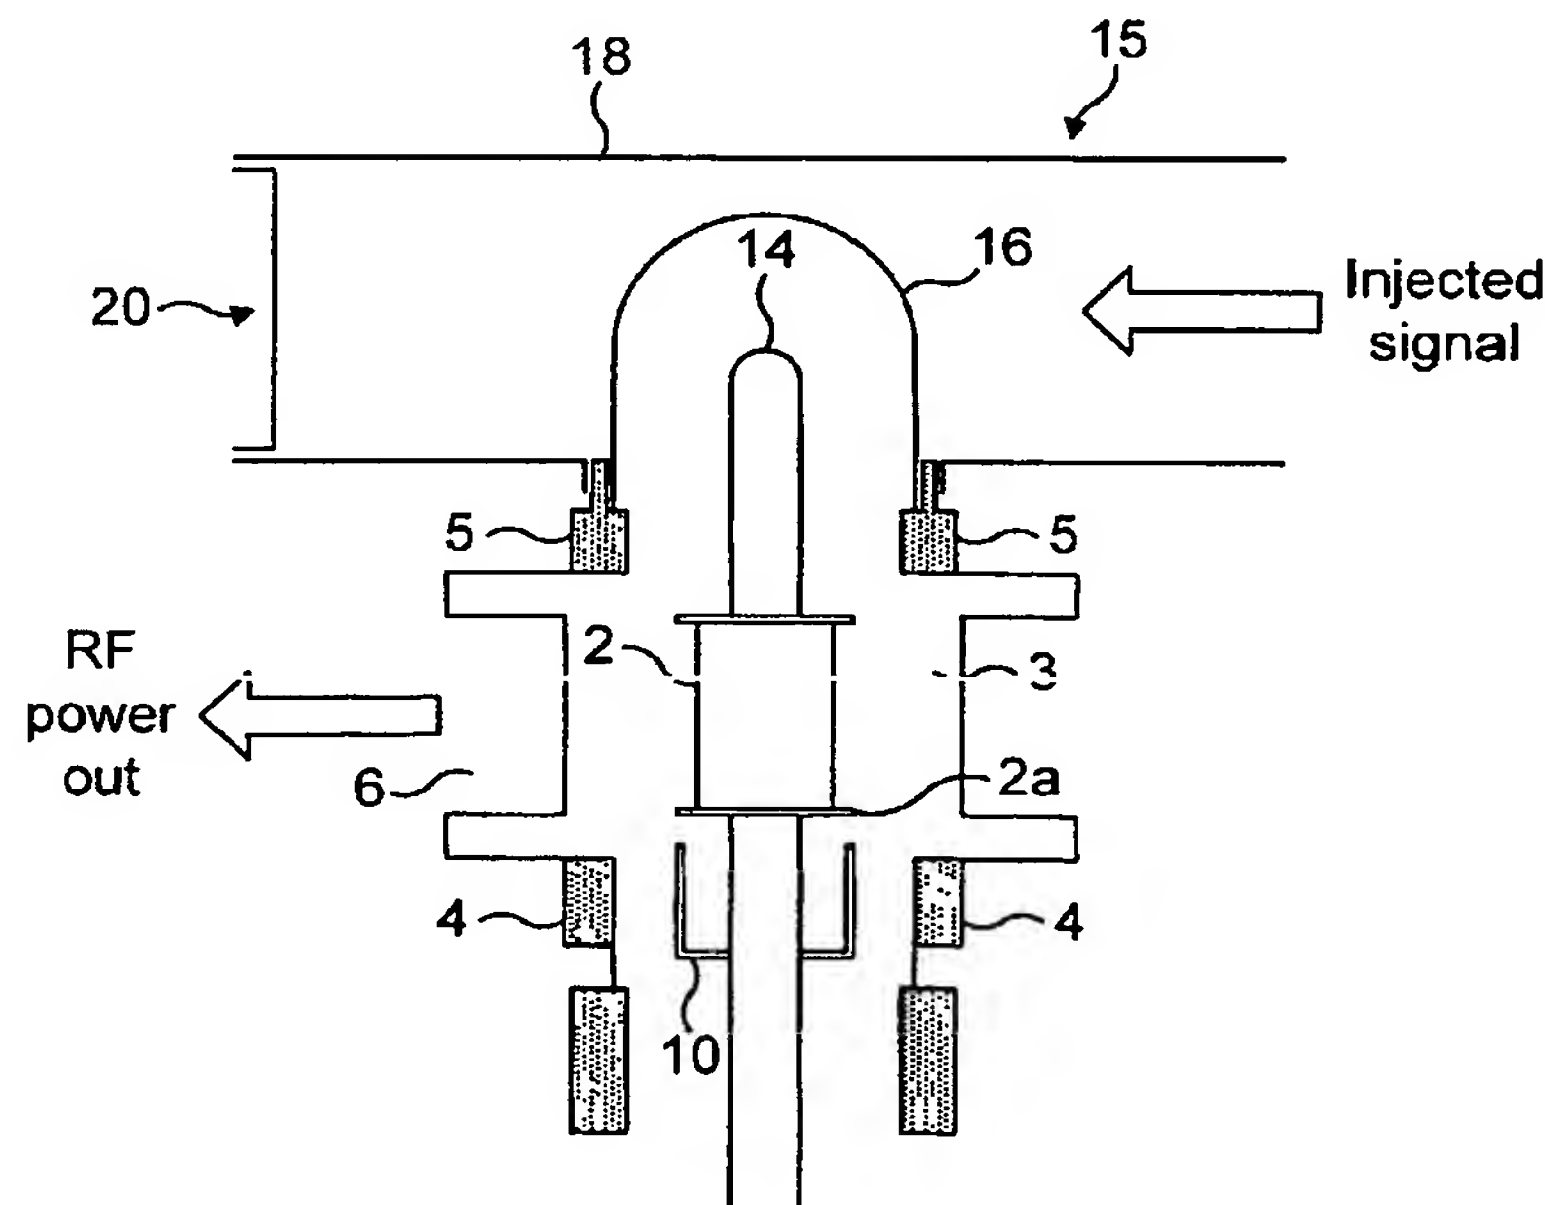

**(57) Abstract:** A phase locked magnetron comprises a cathode (2) and anode (6) and an interaction space in between. The cathode is coupled to an injected locking signal, which prompts the operation of the magnetron to be in phase with the phase of the locking signal. From a magnetron of the type in which the cathode is at a large negative potential, the coupling to the locking signal is by non-contact means (14-18), in particular, by extending (14) the cathode into a waveguide (18) in which the locking signal is present. An alternative arrangement is for a magnetron of the type in which the cathode is substantially at ground potential. In this arrangement the coupling is by direct electrical connection to a conductor having the injected locking signal.



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:  
22 September 2005

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*